Tiger-Vac®

...The name to vacuum with

C-10 EX (4W)
Dry Only

DUST IGNITION PROTECTED
Division 2, Class II, Groups F & G
Certified Zone 22 Hazardous Areas / Dust Group IIIC (Conductive Dusts)

This model can be used to Recover Combustible/Conductive Dusts in Hazardous Locations Division 2 and Zone 22 Dust Group IIIC:
Group F Conductive Carbonaceous Dust (carbon black, coal, coke dust, etc)
Group G All flour Dust (grain, flour, starch, sugar, wood, plastic, chemical dust, etc)
Group IIIC Conductive Dust Zone 22 (as per International Standards)

ESD Safe Vacuum Cleaners for Hazardous Locations are designed to prevent ignition hazards.
We use metal parts or Static Dissipative Powder Coating to prevent Electrostatic Discharge (ESD)

Characteristics

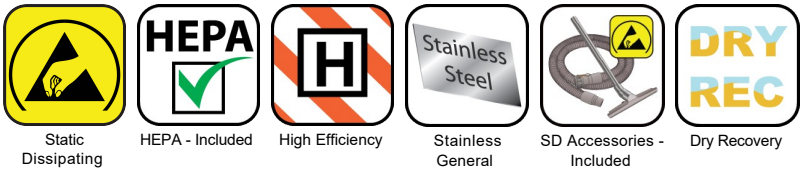

Static Dissipating | HEPA - Included | High Efficiency | Stainless General | SD Accessories - Included | Dry Recovery



- Available with Brushless Motor where applicable
- Intermittent Housekeeping and General Cleaning.
- Bypass Ametek® long life motor
- Includes 4 HEPA filters. Class H14. Individually factory tested.
- Material to be recovered within a Conductive Cloth Recovery Bag.
- Includes an indicator light to advise of vacuum blockage.

SourceGraphics

Tiger-Vac Inc.
11 SW 12th Ave #112
Dania, FL 33004
USA

Tiger-Vac International Inc.
2020 Dagenais Blvd. Ouest
Laval, Quebec
Canada H7L 5W2

Tel: 1-800-668-4437 (954-925-3625)
Fax: 1-800-668-4439 (954-925-3626)

Website: http://www.tiger-vac.com
Email: sales@tiger-vac.com

Specifications

C-10 EX (4W)	111805A	111805A-BLSD
Model Name	C-10 EX (4W)	C-10 EX (4W) BLSD
Type (Powerhead)	Electric	Electric
Voltage	115 V	115 V
Hertz	60 Hz	60 Hz
Phase	Single	Single
Wattage	1207 W	1100 W
Power	1.6 HP	1.3 HP
Amperage	10.5 amps.	13 amps.
Air Flow	110 CFM	127 CFM
Vacuum Pressure	107 " H_20	89 " H_20
Sound Level	72 dB(A)	72 dB(A)
Plug Type	120V	120V
Suction Inlet	60 mm	60 mm
Cart Type	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)
Dry Recovery - Disposable Filter Bag	5 Gal	5 Gal
Length	17 "	17 "
Width	17 "	17 "
Weight (Vacuum Only)	52 lbs.	52 lbs.
Height	40 "	40 "
Cord Length	35 ft.	35 ft.

Please note that specifications are subject to change without notice

Use only recommended tools & accessories



C-10EX Static Dissipative Tools and Accessories - Included



Main Cloth Filter with Cage, Static Dissipative - Included



Conductive Recovery Bag - Included



Upstream HEPA Filter - Included

SourceGraphics
1530 N Harmony Circle Anaheim, CA 92807
sourcegraphics.com
800-791-9042

Tiger-Vac Inc.
11 SW 12th Ave #112
Dania, FL 33004
USA

Tiger-Vac International Inc.
2020 Dagenais Blvd. Ouest
Laval, Quebec
Canada H7L 5W2

Tel: 1-800-668-4437 (954-925-3625)
Fax: 1-800-668-4439 (954-925-3626)

Website: http://www.tiger-vac.com
Email: sales@tiger-vac.com